

CYCLE - VER03

01-04-2011

## POLYURETHANE COATING

Coating cycle with polyurethanic finishing, high mechanical and UV resistance.


### Preparation of the surface

Old substrates will have to be solid, dry, flat, absorbent, and not polluted by oils, cleaning agents, powders or other substances.

For the brand new concrete substrates, the seasoned time must be respected. Choose the most convenient mechanical preparation: abrasion or grinding.

### Application

1. Apply by roll one layer of **PAVIWATER A+B** diluted with 20% of water, for a consumption of around 0,130 kg/m<sup>2</sup> of product A+B.
2. By roll apply one layer of **FINISOL COLOR A+B**, for a consumption of around 0,130 kg/m<sup>2</sup> of product A+B.  
Inert granulates can be added into the **FINISOL** in order to obtain an anti-slip surface. **FINISOL** is available either as transparent or coloured paint.
3. The final thickness is around 100 micron.

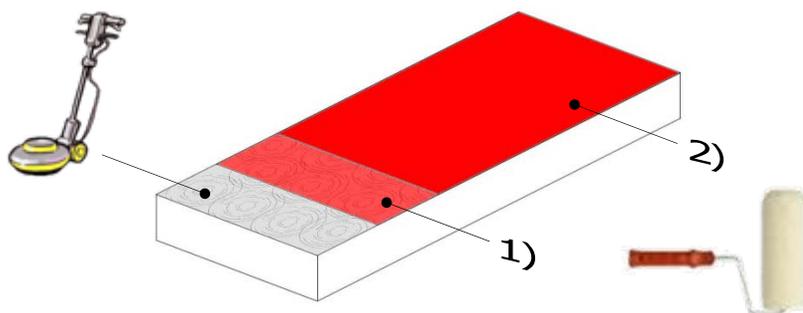

### Warnings

**FINISOL** is a solvent-based product, therefore, during the application, it is necessary to wear active-carbons protective masks.

If the base is particularly absorbing or dusty, apply as primer by roll a layer of **PAVIWATER**, diluted with 50% of water, and then go on as described above.

### Products

PAVIWATER A+B: waterborne epoxy coating

FINISOL CLEAR A+B: solventborne transparent aliphatic polyurethane coating

FINISOL COLOR A+B: solventborne colored aliphatic polyurethane coating

